

110009499 053002

3618 Rec'd PCT/PTO 11 DEC 2001

FORM PTO-1390) (REV. 9-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER 367.40891X00 filed December 11, 2001	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 10/009499	
INTERNATIONAL APPLICATION NO. PCT/IB00/00834		INTERNATIONAL FILING DATE June 9, 2000		PRIORITY DATE CLAIMED June 11, 1999	
TITLE OF INVENTION METHOD AND SYSTEM FOR FETCHING CONTENT FROM A SERVER IN A CELLULAR COMMUNICATION SYSTEM					
APPLICANT(S) FOR DO/EO/US PEDERSEN, CLAUS					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<p>1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</p> <p>4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</p> <p>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))</p> <p>a. <input type="checkbox"/> is transmitted hereto (required only if not communicated by the International Bureau).</p> <p>b. <input checked="" type="checkbox"/> has been communicated by the International Bureau.</p> <p>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office(RO/US)</p> <p>6. <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).</p> <p>a. <input checked="" type="checkbox"/> is attached hereto.</p> <p>b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</p> <p>7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))</p> <p>a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</p> <p>b. <input type="checkbox"/> have been communicated by the International Bureau.</p> <p>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p>d. <input type="checkbox"/> have not been made and will not be made.</p> <p>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</p> <p>9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</p> <p>10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p> <p>Items 11 to 20 below concern document(s) or information included:</p> <p>11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</p> <p>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</p> <p>13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.</p> <p>14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</p> <p>15. <input checked="" type="checkbox"/> A substitute specification.</p> <p>16. <input checked="" type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</p> <p>18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</p> <p>19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</p> <p>20. <input checked="" type="checkbox"/> Other items or information: Figs. 1-5, 6a-6c; Credit Card Payment Form; PCT Request Form; International Preliminary Examination Report w/amended sheets; International Publication No. WO 00/78010; Letter to the Official Draftsperson w/Fig. 1</p>					

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)		INTERNATIONAL APPLICATION NO. PCT/IB00/00834		ATTORNEY'S DOCKET NUMBER 367.40891X00	
10/009499					
21. The following fees are submitted. BASIC NATIONAL FEE (37 CFR 1.492(a) (1) - (5)): <input type="checkbox"/> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO.....\$1040.00 <input checked="" type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO.....\$890.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO\$740.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4).....\$710.00 <input type="checkbox"/> International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4)....\$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =				CALCULATIONS PTO USE ONLY	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	
Total Claims	23- 20 =	3	x \$18.00	\$54.00	
Independent Claims	4- 3 =	1	x \$84.00	\$84.00	
MULTIPLE DEPENDENT CLAIMS(S) (if applicable)			+ \$280.00	\$	
TOTAL OF ABOVE CALCULATIONS =				\$1,028.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$	
SUBTOTAL =				\$1,028.00	
Processing fee of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$	
TOTAL NATIONAL FEE =				\$1,028.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				\$	
TOTAL FEES ENCLOSED =				\$1,028.00	
				Amount to be refunded:	\$
				charged:	\$
a. <input type="checkbox"/> A check in the amount of \$_____ to cover the fees is enclosed.					
b. <input type="checkbox"/> Please charge my Deposit Account No. <u>01-2135</u> in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed.					
c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No <u>01-2135</u> . A duplicate copy of this sheet is enclosed.					
d. <input checked="" type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.					
SEND ALL CORRESPONDENCE TO:					
Antonelli, Terry, Stout & Kraus, LLP 1300 North Seventeenth Street Suite 1800 Arlington, VA 22209 USA					
				SIGNATURE	
				Donald E. Stout	
				NAME	
				26,422	
				REGISTRATION NO.	

DOCKET NO. 367.40891X00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): Claus Pedersen

Serial No: Unassigned

Filed: December 11, 2001

For: METHOD AND SYSTEM FOR FETCHING CONTENT FROM A SERVER IN A
CELLULAR COMMUNICATION SYSTEM

Art Unit: Unassigned

Examiner: Unassigned

PRELIMINARY AMENDMENT

Assistant Commissioner of Patents
Washington, D.C. 20231

December 11, 2001

Sir:

Prior to examination of the above-identified application, please amend the application as follows:

IN THE SPECIFICATION:

Please replace the original specification with the Substitute Specification attached hereto. A marked-up version of the original specification identifying the amendments in the Substitute Specification is also attached.

IN THE CLAIMS

Please cancel claims 1-23 in this new application and replace them with new claims 24-46 as follows:

24. A cellular communication terminal for fetching content from at least one server the terminal comprising:

a receiver and a transmitter which receives and transmits data packets from at least one server through a link which transmits the data packets between the terminal and the server;

a first memory comprising an identifier and at least one item, the item is provided with an access point which indicates the location of the server to be accessed, wherein the server is accessed by sending the identifier to the link to identify a first content to be accessed at the server, first content is associated with link content provided at different locations in the server or in another server;

a browser application, which establishes a session to the link by reading an item from the first memory, and fetches a copy of the first content from the server, at the location indicated by the access point, to be stored in the first or in a second memory, wherein the second memory which temporarily or permanently stores the copy of the first content;

a user interface connected to the browser application having a display which displays the copy of the first content received from the server and a user input which controls the browser application; and

wherein a copy of the first content and a copy of the link content is fetched simultaneously upon a request generated by the browser application, the request is sent through the transmitter as a data packet, comprising an instruction to the server to send a copy of the first content from a given location in the server, indicated by the access point, together with a copy of the link content, simultaneously.

25. A cellular communication terminal according to claim 24, wherein the first content and link content is provided in the same server.
26. A cellular communication terminal according to claim 24, wherein a pull means is provided with a selecting means, in order to choose which content is to be fetched.
27. A cellular communication terminal according to claim 24, wherein the second memory is an external memory, provided with a connection to the terminal.
28. A cellular communication terminal according to claim 24, wherein the second memory is in the terminal.
29. A cellular communication terminal according to claim 24, wherein the second memory is a cache memory.
30. A cellular communication terminal according to claim 24, wherein the first memory is a SIM card.
31. A cellular communication terminal according to claim 24, wherein the terminal is a cellular phone.

32. A method for fetching content from at least one server to a cellular communication terminal, the communication terminal comprising a first memory and a browser application, wherein the method comprises the following steps:

reading an item in the first memory and an identifier, by means of the browser application, the item comprising at least one access point indicating the location of a server to be accessed;

generating a request by means of the browser application, the request comprising information of the requested access point, and the identifier identifying a first content of the requested access point, the first content is associated with link content provided at different locations in the server or in another server;

initiating a session to a link, by transmitting the request from the communication terminal to the link, the link sending data packets between the terminal and the server;

identifying the request at the link; and

establishing a session between the terminal and the link by sending a respond from the link to the terminal, wherein the request is generated by the browser application and has an instruction to the server to send a copy of the first content from a given location in the server, indicated by the access point, together with a copy of the link content, simultaneously, and the cellular communication terminal fetches a copy of the first content and a copy of the link content simultaneously.

33. A method according to claim 32, wherein the copy of the first content and the link content is stored in a second memory.
34. A method according to claim 32, wherein the copy of the first content and the link content are from the same server.
35. A method according to claim 34, wherein fetches a copy of the link content from a further server.
36. A system which fetches content from at least one server, the system comprising:
 - a receiver and a transmitter which receives and transmits data packets from at least one server through a link which transmits the data packets between the terminal and the server;
 - a first memory comprising an identifier and at least one item, the item is provided with an access point which indicates the location of the server to be accessed, wherein the server is accessed by sending the access point and the identifier to the link to identify a first content to be accessed, the first content is associated with link content provided at different locations in the server or in another server;
 - a browser application, which establishes a session to the link by reading an item from the first memory, and fetches a copy of the first content from the server, at the location indicated by the

access point, to be stored in the first or in a second memory, wherein the second memory temporarily or permanently stores the copy of the first content;

a user interface connected to the browser application, having a display which displays the first content and user input control the browser application;

a cellular communication network, which establishes a connection between the cellular communication terminal and link;

the link enables a session for the cellular communication terminal
and transmits data packets between the terminal and a server;

at least one server, receives and/or transmits data packets from/to the terminal; and

wherein a copy of the first content and a copy of the link content is fetched simultaneously upon a request generated by the browser application, the request is sent through the transmitter as a data packet, comprising an instruction to the server to send a copy of the first content from a given location in the server, indicated by the accessed point, together with a copy of the link content, simultaneously.

37. A system according to claim 36, wherein the first content and link content is provided in the same server.
38. A system according to claim 36, wherein the second memory is an

- external memory, provided with a connection to be inputted to the terminal.
39. A system according to claim 36, wherein the second memory is arranged in the terminal.
40. A system according to claim 36, wherein the second memory is a cache memory.
41. A system according to claim 36, wherein first memory is a SIM card.
42. A system according to claim 36, wherein communication between the server and the terminal is in accordance with the Wireless Application Protocol.
43. A communication device for accessing a server accessible via a proxy, the device comprising a transceiver and a browser, the transceiver establishing a session with a proxy, the proxy providing access to the server wherein the browser is operable to retrieve first content from the server together with further content linked to the first content.
44. A device as claimed in claim 43, further including a memory in which the retrieved content is stored.

45. A device as claimed in claim 43, wherein the browser retrieves the further content from a further server.
46. A device as claimed in claim 43, wherein the browser is selectively operable to retrieve the further content.

REMARKS

The claims have been amended to remove the multiple dependent claims before filing fee calculation. New Claims 24-46 have been added. The Abstract of the Disclosure is also enclosed along with the Letter to the Official Draftperson. No new matter has been added to this application.

To the extent necessary, Applicants petition for an extension of time under 37 C.F.R. §1.136. Please charge any shortage in fees due in connection with the filing of this paper, including extension of time fees, to Deposit Account No. 01-2135 (Case No. 367.40891X00) and please credit any excess fees to such Deposit Account.

Entry of the amendment is respectfully solicited.

Respectfully submitted,

ANTONELLI, TERRY, STOUT & KRAUS, LLP



Donald E. Stout
Registration No. 26,422
(703) 312-6600

DES:clt

Attachments

ABSTRACT OF THE DISCLOSURE

A system, a method, and a cellular communication terminal for fetching content from at least one server. The cellular communication terminal is arranged with a receiver and a transmitter, to receive and transmit data packets from at least one server through links. The link is arranged to transmit the data packets between the terminal and the server arranged with a first memory comprising an identifier and at least one item. The item is provided with an access point, which indicates the location of the server to be accessed. The server is accessed by sending the access point and the identified to the link to identify a first content to be accessed. The first content is associated with link content, which is provided at different locations in the server or on other servers. A browser application is arranged in the terminal, to establish a session to link, by reading an item from the first memory.

MARKED-UP VERSION TO THE SPECIFICATION

10/009499

JM5 Rec'd PCT/PTO 11 DEC 2001

Docket No. 367.40891X00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Claus Pedersen

Serial No.: Unassigned

Filed: December 11, 2001

For: METHOD AND SYSTEM FOR FETCHING CONTENT FROM A
SERVER IN A CELLULAR COMMUNICATION SYSTEM

Art Unit: Unassigned

Examiner: Unassigned

LETTER TO THE OFFICIAL DRAFTSPERSON

Assistant Commissioner for Patents
Washington, D.C. 20231
Attention: Ms. Bridget Gray


11 December 2001

Sir:

Attached is a marked copy of Fig. 1, with proposed corrections indicated in ink thereon.

Approval of the proposed corrections is courteously solicited.

Respectfully submitted,



Donald E. Stout
Registration No. 26,422
ANTONELLI, TERRY, STOUT & KRAUS, LLP
1300 North Seventeenth Street, Suite 1800
Arlington, VA 22209
Telephone 703-312-6600
Facsimile 703-312-6666

1 / 6

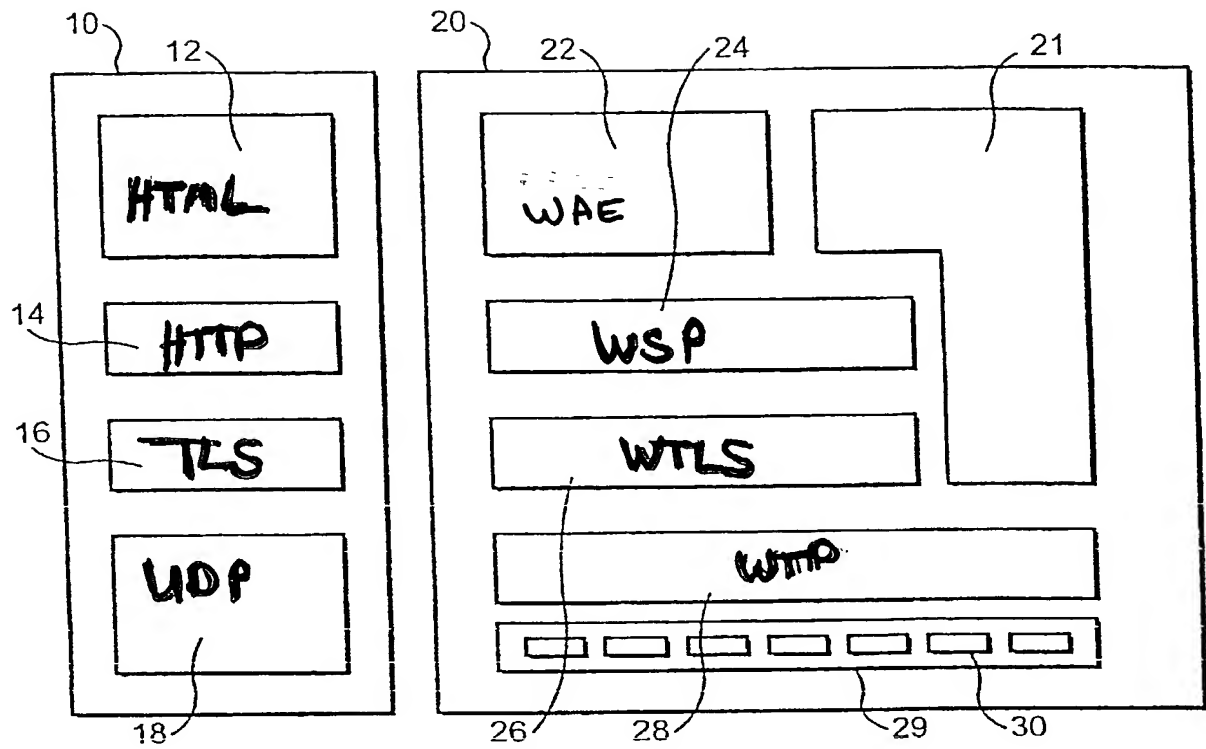


FIG. 1

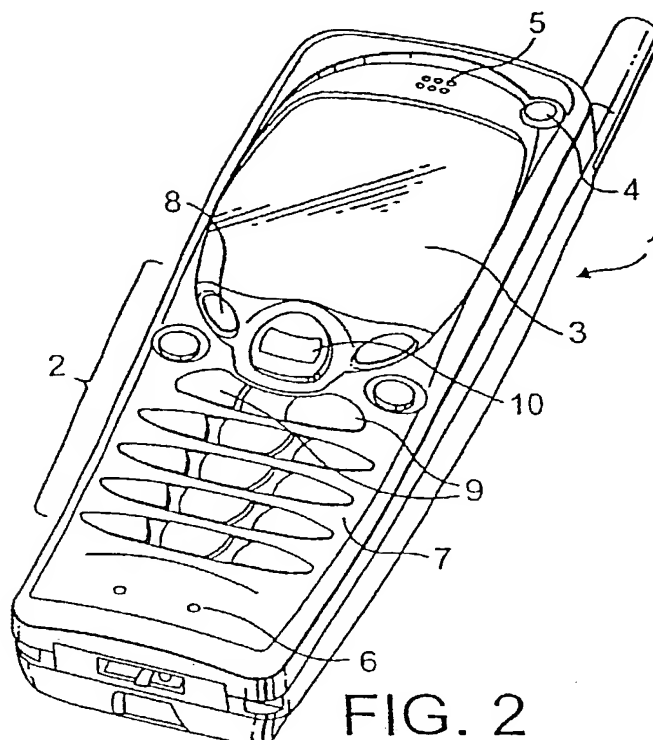


FIG. 2

METHOD AND SYSTEM FOR FETCHING CONTENT FROM A SERVER IN A CELLULAR COMMUNICATION SYSTEM

5

The invention relates to a cellular terminal, method and a system for fetching content from a server to a cellular terminal.

10

15

20

The Wireless Application Protocol (WAP) is a result of continuous work to define an industry wide standard for developing applications over cellular communication networks. This makes it possible to access for example the Internet or other kinds of information networks provided with hypermedia servers, from an ordinary cellular phone supporting WAP. These types of cellular phones which supports WAP, have only a small fraction of the resources of a typical desktop or portable computer. This means that the features in the phone are very limited compared to a computer. The reason for this limitation is the size of the phones, i.e. the phone has a severe limitation in processing power, memory space, display size and buttons or keys by which a user can request, view and manipulate information obtained from a hypermedia server. Therefore, it is very important that the features in the phone are made as efficient as possible. Also, the relatively high cost for a call from a cellular phone makes it also very important to provide the client with a fast response from the server.

25

30

The WAP Architecture is very similar to the Internet Architecture. Figure 1 shows a comparison between the Internet Architecture 10 and the WAP Architecture 20. The Internet Architecture 10 comprises a Hypertext Markup Language (HTML) 12, e.g. Java Script, a Hypertext Transfer Protocol (HTTP) 14, Transport Layered Security (TLS) / Secure Sockets Layer (SSL) 16, and a Transport Configuration Protocol (TCP) / User Datagram Protocol (UDP) 18. The Internet Architecture 10 is well known prior art, and is disclosed in e.g. in US-A-5,657,390. The WAP Architecture 20 comprises a Wireless Application Protocol (WAE) 22 corresponding to HTML 12, a Wireless Session Layer (WSP) 24 corresponding to HTTP 14, a Wireless Transport Layered Security

WO 00/78010

PCT/IB00/00834

- (WTLS) 26 corresponding to TLS / SSL 16, and a Wireless Transport Layer (WTP) 28 corresponding to TCP / UDP 18. Furthermore, the WAP Architecture comprises different bearers 29 like e.g. SMS, USSD and CDMA 30. There is also a possibility to implement different kinds of services and applications in the WAP Architecture, e.g. Value Added Services (VAS). The WAP Architecture 20 is well known prior art and is therefore not being disclosed any further. More detailed information about WAP can at present be found at the following Internet address: <http://www.wapforum.org/>
- 10 A Wireless Application Environment which forms a upper layer of the WAP stack includes a browser application, even called a microbrowser. The browser uses wireless mark-up language (WML) and a lightweight mark-up language, WMLScript a lightweight scripting language. WML implements a card and deck metaphor. The interaction of the browser and user is described
- 15 in a set of cards which are grouped together into a document commonly referred to as a deck. The user navigates to a card in a deck reviews its content and then navigates to another card in the same deck or in a different deck. Decks of cards are transferred from origin servers as needed.
- 20 US-A-5,895,471 discloses a way of storing hypermedia links, used by a cellular phone. The hypermedia links are stored as bookmarks on a server to save memory space in the phone. The hypermedia links could be identified as uniform resource locators (URL), which are used to identify and control access to resources on a network like the Internet. US-A-5,895,471 also gives
- 25 a basic indication of how WAP is working, e.g. they describe how the hypermedia information is organised into cards and decks. Instead of referring to WML, they refer to a language mentioned as Handheld Device Markup Language (HDML). Furthermore, it is mentioned that the phone can be provided with a cache memory, to store received decks from a hypermedia
- 30 link. Thus, it is possible that the phone first consults the cache to determine if a requested deck is available in the phone. If the deck is available, it can be accessed without requiring any communication with the network. It is also mentioned how to store navigation history of hyperlink traversals and a history of user activity.

However, in some cases, history and bookmark information is not always well suited for navigation. While some of the content in the decks or cards may include internal hypermedia links that point to different locations within the same deck/card, history and bookmark information permits navigation within such decks/cards only to particular locations specified by the internal hypermedia links. Instead, separate mechanisms such as scroll bars must be used as the principal mechanisms for navigating to particular locations within decks/cards. Consequently, an end user is often forced to consciously click on different objects in a graphical user interface depending on different objects in a graphical user interface depending upon whether the end user wishes to navigate between decks/cards or to navigate within decks/cards. As a result, navigation with this type of user interface is slow and burdensome for many end users.

15

As mentioned in US-A-5,895,471, it is possible to access content from an earlier session, even when the phone is out of coverage, if the content has been stored in the cache. However, even if the user has downloaded his cellular phone with a hierarchy of cards/decks from hypermedia links, the user cannot always rely on that all the links have been stored in e.g. a cache memory. One reason, for the deck/card not being stored in the cache, could be that the user did not access this deck/card. Another reason could be that one of the cards/decks was deleted during a visit to other links, e.g. older cards/decks saved in the cache are dropped to allow new cards/decks to be stored instead. Typically, the cards/decks which are deleted/inserted according to a First In First Out (FIFO) principle. Furthermore, the user cannot be sure if all the content stored in the cache connected to the same cards/decks is updated. For example, if the content on the server has changed, and include new links which will not be apparent in an update with the server. Accordingly, the user will not be able to receive this information, since the update is mostly related to the existing decks/cards in the cache.

20
25
30

Therefore, a significant need exists for a manner of ensuring that the phone has received the latest content together with associated links, which could be

relevant for the user. Moreover, there is a need for the user to facilitate a download of decks/card, especially to access content at a later occasion e.g. when the user is in an out of coverage area, or so called off-line.

5

It is an aim of the present invention to facilitate the user to browse when the terminal is not connected to a network, like the Internet, without having the need to download further content related to the already downloaded content.

10 Thus, it would be appreciated to enable the user to browse around in downloaded content when using the terminal for so called off-line browsing.

According to one aspect of the invention, there is provided a cellular communication terminal for fetching content from at least one server, said
15 terminal comprising

- a receiver and a transmitter arranged to receive and transmit data packets from at least one server through linking means arranged to transmit the data packets between the terminal and the server;
- a first memory comprising an identifier and at least one item, the item is
20 provided with an access point which indicates the location of the server to be accessed, wherein the server is accessed by sending the identifier to the linking means to identify a first content to be accessed at the server, said first content is associated with link content provided at different locations in said server or in another server;
- 25 - a browser application, arranged to establish a session to linking means by reading an item from the first memory, and is provided with pull means to fetch a copy of the first content from the server, at the location indicated by said access point, to be stored in the first or in a second memory, wherein said second memory is arranged to temporarily or permanently store said
30 copy of the first content, and
- a user interface connected to the browser application having display means for displaying the copy of the first content received from the server and user input means to control the browser application,

characterized in that the pull means is further arranged to fetch a copy of the first content and a copy of the link content simultaneously upon a request generated by the browser application, said request is arranged to be sent through said transmitter as a data packet, comprising an instruction to the server to send a copy of the first content from a given location in the server, indicated by the access point, together with a copy of the link content, simultaneously.

Thus, the requested content is being sent to the user, as a single response to a request made by the user, wherein the response can comprise one or several data packets sent in series. Thus, if the user would like to receive further content which is linked to the first content, it is not necessary for the user to access the content before using the content in an off-line browsing. In this manner, the user is able to fetch the latest content from a server, and use it when he/she is going off-line. This is particularly advantageous when the user is out of coverage of a cellular network, to which the user subscribes. It is also very useful for users who are travelling abroad, and are connected to a foreign network which is mostly far more expensive than the home network. Also, it enables the user to download the content when having access to a high-band channel, like General Packet Radio Service (GPRS) and/or High Speed Circuit Switched Data (HSCSD). It could also possible for the user to use a cheaper bearer, like the user's home cellular network and/or virtual Private Automatic Branch Exchange (PABX) on a local charge.

According to a further aspect of the invention, there is provided a method for fetching content from at least one server to a cellular communication terminal, said communication terminal comprising a first memory and a browser application, wherein the method comprises the following steps:

- reading an item in said first memory and an identifier, by means of said browser application, said item comprising at least one access point indicating the location of a server to be accessed;
- generating a request by means of said browser application, said request comprising information of the requested access point, and the identifier identifying a first content of the requested access point, said first content is

associated with link content provided at different locations in said server or in another server;

- initiating a session to linking means, by transmitting the request from the communication terminal to the linking means, said linking means sends
5 data packets between the terminal and the server ,

- identifying the request at the linking means, and

- establishing a session between said terminal and said linking means by sending a respond from the linking means to the terminal,

characterized in that the request, generated by means of said browser
10 application, having an instruction to the server to send a copy of the first content from a given location in the server, indicated by the access point, together with a copy of the link content, simultaneously, and the cellular communication terminal fetches a copy of the first content and a copy of the link content simultaneously.

15

According to a still further aspect of the invention, there is provided a system for fetching content from at least one server, said system comprising

- a cellular communication terminal having:

- a receiver and a transmitter arranged to receive and transmit data
20 packets from at least one server through linking means arranged to transmit the data packets between the terminal and the server;

- a first memory comprising an identifier and at least one item, the item is provided with an access point which indicates the location of the server to be accessed, wherein the server is accessed by sending the access
25 point and the identifier to the linking means to identify a first content to be accessed, said first content is associated with link content provided at different locations in said server or in another server;

- a browser application, arranged to establish a session to linking means by reading an item from the first memory, and is provided with pull
30 means to fetch a copy of the first content from the server, at the location indicated by said access point, to be stored in the first or in a second memory, wherein said second memory is arranged to temporarily or permanently store said copy of the first content, and

- a user interface connected to the browser application, having display means for displaying the first content and user input means to control the browser application,
- a cellular communication network, arranged to establish a connection between the cellular communication terminal and linking means (360),
- linking means, arranged to enable a session for said cellular communication terminal and to transmit data packets between the terminal and a server, and
- at least one server, arranged to receive and/or transmit data packets from/to the terminal,

characterized in that the pull means is further arranged to fetch a copy of the first content and a copy of the link content simultaneously upon a request generated by the browser application, said request is arranged to be sent through said transmitter as a data packet, comprising an instruction to the server to send a copy of the first content from a given location in the server, indicated by the access point, together with a copy of the link content, simultaneously.

According to another aspect of the invention, there is provided a communications device for accessing a server accessible via a proxy, the device comprising a transceiver and a browser, the transceiver being operable to establish a session with a proxy, the proxy providing access to a server wherein the browser is operable to retrieve first content from the server together with further content linked to the first content.

25

A particular advantageous embodiment, is to provide the cellular communication terminal with an external memory, provided with connecting means to be inputted to the terminal. This will enable the user to have greater flexibility when accessing stored content, since the user is able to handle the stored content whenever he/she would like to. For example, if the user is going on a journey, and would like to create a database of information connected to the geographical location he/she is planning to visit, then the information can be stored in this external memory and accessed whenever the

30

information is needed. Thus, since an internal memory in the terminal is quite limited, this will save valuable memory space as well as providing the user with greater flexibility.

5 Further advantages according to the present invention will be apparent from the dependent claims.

The invention will be described in greater detail in the following by way of example only and with reference to the attached drawings, in which

10

Fig. 1 shows a comparison between the Internet Architecture and the WAP Architecture;

15

Fig. 2 schematically illustrates a preferred embodiment of a hand portable phone according to the present invention,

Fig. 3 schematically shows the essential parts of a telephone for communicating with a cellular or cordless network,

20

Fig. 4 schematically shows a connection between a communication terminal and different servers in a network, according to a preferred embodiment according to the present invention, and

25

Fig. 5 shows a flowchart over a method for fetching content from a server to a cellular telecommunication terminal, according to the present invention.

Fig. 6a-c shows an example of a user interface in a phone according to the present invention.

30

Figure 2 shows a preferred embodiment of a cellular communication terminal, hereafter also referred to as a phone, according to the present invention. The phone, which is generally designated by 1, comprises a user interface having a keypad 2, a display 3, an on/off button 4, a speaker 5, and a microphone 6.

WO 00/78010

PCT/IB00/00834

9

The phone 1 according to the preferred embodiment is adapted for communication via a cellular telecommunication network, e.g. a cellular network. However, the phone could also have been designed for a cordless network. The keypad 2 has a first group 7 of keys as alphanumeric keys, by means of which the user can enter a telephone number, write a text message (SMS), write a name (associated with the phone number), etc. Each of the twelve alphanumeric keys 7 is provided with a figure "0-9" or a sign "#" or "*", respectively. In alpha mode each key is associated with a number of letters and special signs used in text editing. The keypad 2 additionally comprises two soft keys 8, two call handling keys 9, and a navigation key 10.

The two soft keys 8 have a functionality corresponding to what is known from the phones Nokia 2110™, Nokia 8110™ and Nokia 3810™. The functionality of the soft key depends on the state of the phone and the navigation in the menu by using a navigation key. The present functionality of the soft keys 8 is shown in separate fields in the display 3 just above the keys 8.

The two call handling keys 9 according to the preferred embodiment are used for establishing a call or a conference call, terminating a call or rejecting an incoming call.

The navigation key 10 is an up/down key and is placed centrally on the front surface of the phone between the display 3 and the group of alphanumeric keys 7. Hereby the user will be able to control this key by simply pressing the up/down key using his/her thumb, i.e. it allows the user to scroll between a group of items in e.g. a menu provided in the user interface. Since many experienced phone users are used to one-hand control, it is a very good solution to place an input key, requiring precise motor movements. Thus, the user may place the phone in the hand between the finger tips and the palm of the hand. Hereby, the thumb is free for inputting information. In another embodiment, the scroll key can be a roller key (not shown), which is arranged to rotate in one or several directions. The roller allows the user to roll the key to scroll between different items in a menu. In case of a roller key, the soft key 8 could be arranged to the roller, i.e. upon pressing on the roller the same

WO 00/78010

10

PCT/IB00/00834

functionality, as the operation key has, could be entered. The roller key has a functionality corresponding to what is known from e.g. the phone Nokia 7110™, which also supports the Wireless Application Protocol (WAP). The roller key is incorporated by reference in US patent application 08/923,696.

5

Figure 3 schematically shows the most essential parts of a preferred embodiment of the phone. These parts being essential to understand the invention. The preferred embodiment of the phone of the invention is adapted for use in connection with a GSM network, but, of course, the invention may also be applied in connection with other phone networks, such as other kinds of cellular networks and various forms of cordless phone systems or in dual band phones accessing sets of these systems/networks. The microphone 6 records the user's speech, and the analogue signals formed thereby are A/D converted in an A/D converter (not shown) before the speech is encoded in an audio part 14. The encoded speech signal is transferred to control means 18. The control means 18 comprises a processor, which may support software in the phone. The control means 18 also forms the interface to the peripheral units of the apparatus, wherein the peripheral units can comprise a RAM memory 17a and a Flash ROM memory 17b, a SIM card 16, the display 3 and the keypad 2 (as well as data, power supply, etc.). The control means 18 communicates with a transmitter/receiver means 19, e.g. a circuit which is adapted to send/receive a request/respond to/from a telecommunication network. The audio part 14 speech-decodes the signal, which is transferred from the control means 18 to the earpiece 5 via a D/A converter (not shown).

25

The control means 18 is connected to the user interface. Thus, it is the control means 18 which monitors the activity in the phone and controls the display 3 in response thereto. Therefore, it is the control means 18 which detects the occurrence of a state change event and changes the state of the phone and thus the display text. A state change event may be caused by the user when he activates the keypad including the navigation key 10, and these type of events are called entry events or user events. However, the network communicating with the phone may also cause a state change event. This type of event and other events beyond the user's control are called non user

30

events. Non user events comprise status change during call set-up, change in battery voltage, change in antenna conditions, message on reception of SMS, etc.

- 5 Fetching content from a server to be used in a cellular communication terminal.

Figure 4 schematically shows a system 301, comprising a cellular communication terminal 300, a cellular network 310, and a plurality of web
10 servers 320, 330 and 340 in an Internet network 350. The Internet network 350 uses World Wide Web (WWW) protocols. The cellular network 310 is arranged to establish a wireless connection 305 between a plurality of cellular terminals 300 and linking means 360. Even if the gateway is usually connected to a server to be accessed, it is possible that the gateway may be
15 integrated together with the server to be accessed, as well.

The terminals 300 are able to access one of the web servers 320-340 via the linking means 360. The terminals 300 could typically be a cellular phone. In general, the linking means 360 is arranged to enable a session for the cellular
20 communication terminal 300 and to transmit data packets between the terminal and one of the web servers 320-340. Thus, the web servers 320-340 are arranged to receive and/or transmit data packets from/to the terminal 300. The transfer of data packets is often mentioned as pull and/or push. A pull could be described as the terminal using an access point to access a location
25 where the provider information is stored, and might also determine whether it has been updated and to retrieve it if necessary. In some cases it could also be possible to use a push, which could be described as the opposite to pull, i.e. the server maintains address data necessary to transfer updated information to the terminal.

30

The linking means 360 in this example is typically a gateway or a proxy, but is hereafter referred to as gateway. A proxy server is a process that allows the user to fetch different types of documents, like WWW, FTP, and GOPHER documents. The proxy server can store the documents in a cache memory in

the radio terminal. What this means is that when anyone retrieves a document, besides transferring these files to the radio terminal, a copy is also made on the local host. Thus, the next time the user accesses that document, a request is sent to the remote host to see if the page has been updated, and if not, it is read directly from the cache memory. A gateway can be a computer that lies at the intersection of a server to be accessed and a client, and routes traffic from one or several servers to the client. Thus, the function of the gateway is to provide a link between two disparate types of electronic communications such as WAP architecture and Internet architecture.

Communication between a cellular terminal 300 and the gateway 360 is according to the Wireless Application Protocol (WAP).

WAP defines a set of standard protocols that enable communication between cellular communication terminals, like cellular phones and network servers. Other types of communication terminals could be pagers and personal digital assistants. WAP uses a standard naming model according to which standard Internet URLs are used to identify content on different web servers. It also uses content typing. All WAP content is given a specific type consistent with WWW typing which allows a cellular terminal to correctly process the content based on type. WAP also uses standard content formats and standard communication protocols. Thus, WAP brings Internet content and advanced data services to cellular terminals. WAP can work across differing cellular network technologies and bearer types (GSM, CDMA, SMS). Communication between the web servers 320-340 and the gateway 360 is according to WWW protocols.

In this embodiment, the gateway 360 translates requests from a WAP protocol stack used by the cellular terminal 300 to a WWW (World Wide Web) protocol stack used by the web server. The web server can for example return WAP content such as WML (Wireless Markup Language) or WWW content such as HTML (HyperText Markup Language). In the later case a filter is used to translate the WWW content to WAP content e.g. HTML to WML. The gateway also encodes content sent over the cellular network to the cellular terminal and decodes data sent to it by the cellular terminal. A Wireless Application

Environment which forms an upper layer of the WAP stack includes a browser application, also called a microbrowser. The browser uses WML and a lightweight markup language, WMLScript a lightweight scripting language. WML implements a card and deck metaphor. The interaction of the browser and user is described in a set of cards which are grouped together into a document commonly referred to as a deck. The user navigates to a card in a deck reviews its content and then navigates to another card in the same deck or in a different deck. Decks of cards are transferred from origin servers as needed. Thus, the content which the user receives mostly from a server comprises cards and decks.

The cellular communication terminal differs from a desktop or a portable computer with Internet facilities in that generally it has a less powerful CPU, less memory, restricted power consumption, smaller displays and more limited input devices. The cellular network differs from the Internet network in that generally has less bandwidth, more latency, less connection stability and less predictable availability. The WAP architecture is optimised for narrow bandwidth bearers with potentially high latency and is optimised for efficient use of device resources.

In order to communicate with the cellular network 310 and to receive and transmit data packets from e.g. the web server 320 through the gateway 360, the cellular communication terminal 300 comprises a receiver and a transmitter, see also Figure 3 ref. no. 19. The terminal 300 further comprises a first memory, see Figure 3 ref. no. 16 (SIM card) and 17b (ROM), provided with an identifier and at least one item. The item is provided with an access point which indicates the location of the server to be accessed, which could be indicated by means of a URL (Uniform Resource Locator) address. In addition, the item can also comprise data packets from earlier sessions which is updated upon a new session to the same access point. The identifier is used to identify a first content at the address provided by the server, wherein the server is accessed by sending the identifier to the linking means to identify which type of content is requested at the server. In addition, the first content is

associated with link content, which is provided at different locations in the server 320 or in another server 330, 340.

Also, the item can comprise a script, which is arranged to provide provisions
5 for accessing servers through linking means. The script can activate or
download linking applications from a gateway, i.e. an application which makes
it possible to receive and/or transmit different types of data packets between
the server and the terminal. For example, the different types of data packets
can be a particular text format, software programs, picture formats. This
10 allows the processing power of the terminal to be less restricted, by using a
standard WAP browser and provides flexibility for new features. This can be
done by creating extensions to WML and WML script. Thus, the script can
make it possible to access data packets, which might not be supported by the
software in the terminal, by downloading the appropriate application,
15 supporting the type of data format, directly to the terminal. In general, the data
packets, can be data (content) stored or generated at an origin server 320.
The first content of the data packet is typically displayed or interpreted by the
client.

20 As mentioned before, the Wireless Application Environment forms an upper
layer of the WAP stack, and includes a browser application. To access
different servers the terminal must be provided with a browser application, like
a so called microbrowser. The browser application is arranged to establish a
session to at least a first gateway by reading the item in the first memory:
25 Also, the browser application is also provided with pull means to fetch a copy
of the first content from the server 320, at the location indicated by the access
point.

In accordance with the present invention, the pull means is further arranged to
30 fetch a copy of the first content and a copy of the link content simultaneously,
upon a request generated by the browser application. This request is
arranged to be sent through the transmitter as a data packet. The request
comprises an instruction to the server to send a copy of the first content from
a given location in the server, indicated by the access point, together with a

copy of the link content, simultaneously. By simultaneously means that the requested content is being sent to the terminal, as a single response to the request, wherein the response can comprise one or several data packets sent in series. Thus, upon sending this request to the server, all link content associated with the first content is downloaded to the terminal. For example, this could mean that the user interface is displaying an option, when using the browser application, giving the user an opportunity to download all or parts of the content related to a so called homepage. The location of the homepage, in the server, is indicated by the access point. The content related to the homepage comprises, in general, several link content which is related to the same location of the homepage. There might also be other links, which are related to another homepage, at another location, which means that the total amount of content could be quite large. Therefore, in a preferred embodiment of the present invention, the first content and the link content, to be downloaded into the phone, could be restricted to the same server. Naturally, it can be possible that the server sends information about the content provided on the server, like the number of content, the size of the content, content to other locations, etc. In this manner, it will be possible for the user to choose what content he would like to receive, and receive the content upon a downloading request, i.e. by using the pull means provided in the browser application.

The copy of the first content is stored in the first or in a second memory of the terminal. The second memory could be a cache memory, (the RAM memory 17a in Figure 3) which enables the user to temporarily store content, but it could also be a permanent memory like a ROM memory. A user interface is connected to the browser application having a display for displaying the first content and user input means to control the browser. An example of how the user interface can be displayed during a session is shown in Figure 6a-c. The input means is shown in Figure 2 as the keypad 2. The browser can be arranged in a ROM memory or on a SIM card, as shown in Figure 3 ref. No. 17b and 16, respectively.

In another preferred embodiment, the second memory could be an external memory 370, provided with connecting means 380 to be inputted to the terminal. The connecting means 380 can comprise a wired link or a wireless link (like an infra-red link or a low power RF link (e.g. Bluetooth)). If it comprises a wired link, it can also comprise a cable provided with electrical plugs, to physically connect the cache to the terminal. If the connecting means is a wireless link, it is suitable to provide the terminal with an appropriate protocol, to control the access to the second memory. Naturally, the wired link should also be provided an appropriate protocol, to control the access to the second memory. The external memory 370 could provide greater flexibility to the user. For example, one who would like to save content to be used at different occasions in the future, or one who would like to save more content than the internal memory could provide. Naturally, the external memory could also be a cache memory.

As an alternative, it can also be possible to save the content from a session in a permanent storage memory, which means that the user is able to confirm if the content is going to be saved or deleted. The permanent storage memory could be identified as the SIM card 16 and/or the ROM memory 17b as shown in Figure 3.

A method for fetching content through a cellular communication terminal.

Figure 5 shows a flow chart, in accordance with the present invention, describing a way of fetching content from a server through a cellular communication terminal. The cellular telecommunication terminal in this example is the same type as described in Figures 2 and 3, and the apparatus is hereafter also referred to as a phone. The phone is provided with a browser application and a first memory which enables the user to browse among different objects on a server. This browsing can be done by using a browser application supporting WAP. When the phone is activated and establishes a wireless connection to a cellular network, e.g. when the phone roams to a new network, "START" 500, it is possible to communicate with different

telecommunication services, e.g. WAP related services, i.e. a service which can be accessed from a server to the phone. By using this kind of service, it might be possible to obtain information from a server to the phone, e.g. by using SMS (Short Message Service), or a similar service.

5

First, the user may select a browser menu on a display controlled by the browser application, which is connected to the first memory. In this browser menu the user can choose to establish a session to a server. To establish the session the user selects the service connected to the server from the menu.

10 The selection is done by e.g. pressing on one of the softkeys as shown in Figure 2. Then the browser application reads and identifies the content of an item from the first memory "READ ITEM" 510. This item comprises at least one access point, which indicates the location of the server to be accessed. The item might comprise more content than the access point, e.g. it is
15 possible to have data packets received from an earlier session which is updated upon a new session to the same access point. The first memory is also provided with an identifier, which is used to identify a first content at the server. This first content is associated with link content, provided at different locations in the server. It is also possible that the link content could be
20 provided on another server. After reading the item from the first memory, the browser application generates a request, "GENERATE REQUEST" 520, in order to fetch a copy of the first content from the server, at the location indicated by the access point. Thus, the browser application is also provided with pull means, to fetch copies of content provided by a server. This request
25 comprising information of the access point to be accessed, and the identifier identifying the first content at the server. The information could for example be a URL address, where the server is located. The request is then sent through the transmitter as a data packet.

30 A pull could be described as the terminal uses the access point to access a location where the provider information is stored, and might also determine whether it has been updated and to retrieve it if necessary. In some cases it could also be possible to use a push, which could be described as the

WO 00/78010

18

PCT/IB00/00834

opposite to pull, i.e. the server maintains address data necessary to transfer updated information to the terminal.

In accordance with the present invention, the pull means is further provided to
5 fetch a copy of the first content and a copy of the link content simultaneously,
by means of the request generated by the browser application. To fetch
content simultaneously, the request also comprises an instruction to the
server to send a copy of the first content from a given location in the server,
indicated by the access point, together with a copy of the link content,
10 simultaneously. By simultaneously means that the requested content is being
sent to the terminal, as a single response to the request, wherein the
response can comprise one or several data packets sent in series. Thus, upon
sending this request to the server, all link content associated with the first
content is downloaded to the terminal.

15

For example, the user interface is displaying an option (see Figure 6a), when
using the browser application, giving the user an opportunity to download all
or parts of the content related to a so called homepage. The location of the
homepage, in the server, is indicated by the access point. In general, the
20 content related to the homepage comprises several link content which is
related to the same location of the homepage. There might also occur other
links, which is related to another homepage, at another location, which means
that the total amount of content could be quite large. Therefore, in a preferred
embodiment of the present invention, the first content and the link content, to
25 be downloaded into the phone, could be restricted to the same server.
Naturally, it can be possible that the server first sends information about the
content provided on the server, like the number of content, the size of the
content, content to other locations, etc. In this manner, it will be possible for
the user to choose what content he would like to receive, and receive the
30 content upon a downloading request, i.e. by using the pull means provided in
the browser application.

The request is than transmitted to the linking means, "TRANSMIT REQUEST"
530, in order to establish a session between the linking means and the

WO 00/78010

19

PCT/IB00/00834

terminal. The linking means could be a gateway or a proxy server, which links the requested information to the correct access point. If the linking means do not respond to the request, "RECEIVED REQUEST?" 540, e.g. because the linking means is broken or the terminal does not have coverage to the cellular
5 network, the terminal could receive an error message, which says that a connection to the linking means could not be established. Then, the user could choose to re-send the request once more, "TRANSMIT REQUEST" 530.

The item can comprise a script, which is arranged to provide provisions for
10 accessing servers through the linking means. The script can activate or download linking applications from a gateway, i.e. an application which makes it possible to receive and/or transmit different types of data packets between the server and the terminal. For example, the different types of data packets can be a particular text format, software programs, different picture formats,
15 etc. This allows a standard WAP browser to be used and provides flexibility for new features. This can be done by creating extensions to WML and WML script. Thus, the script can make it possible to access data packets, which might not be supported by the software in the terminal, by downloading the appropriate application, supporting the type of data format, directly to the
20 terminal. In general, the data packets, is data (content) stored or generated at an origin server. The content of the data packet is to be displayed or interpreted by the client.

After the terminal has been connected to the linking means, the linking means
25 can control that the access point is correct, "ACCESS POINT KNOWN?" 550. For example, if the user has requested access to a server which no longer exists, is misspelt, or for some other reason is no longer known, the linking means could transmit an error message. This error message could then be displayed on the terminal, "DISPLAY ERROR MESSAGE" 560, providing the
30 user with information about the error. Then the session could be terminated, either by the user or the linking means, "END" 570. If the access point is known, the linking means can send a pull to the server, "SEND PULL TO THE SERVER" 580.

Finally, when the server has sent the requested information to the linking means, the information will be linked (pushed) further from the linking means to the terminal, "DISPLAY CONTENT" 590. However, it is not necessary to display the received content, e.g. it could be directly stored in the first memory. Also, in a preferred embodiment, the first and the linking content can be stored in a second memory, e.g. a cache memory which enables the user to temporarily store the fetched content. Finally, the session could be terminated, either by the user or the linking means, "END" 570.

10 The user interface.

With reference to Figure 6a, 6b and 6c, an example is shown of how the display in a user interface can act when accessing a server according to the present invention. The user interface may comprise the same elements as shown in Figure 2, i.e. a keypad 2, a display 3, an on/off button 4, a speaker 5 and a microphone 6. Also, the terminal is provided with control means 18 as shown in Figure 3, which controls the user interface. Starting from Figure 6a, there is a layout 31 presented on a display in a phone, as shown in Figure 2 and 3, which indicates signal strength 35 from the cellular telecommunication network "D1 Telekom" 40, the battery power 45 and a clock showing the time 50 in hours and minutes. Preferably, the display in the phone is an LCD (Liquid Crystal Display) display. The display, can be controlled by the control means. The layout 30 presents an example of the phone in idle mode, i.e. when the phone is activated and awaiting an action, e.g. an incoming or outgoing call. In the bottom of the display there are two items which are denoted as "Menu" 55 and "Names" 60. If the user selects "Names" 60 he/she can e.g. access a built in phone book. If the user selects "Menu" 55, he/she can select among several different menus. The actual selection of features in the bottom of the display, like "Menu" and "Names", can be selected by means of the soft keys disclosed with reference to Figure 2.

One of the menus can be the next layout 65 called "Browser" 70. If the user chooses to use this menu, he/she can access different telecom related

information services, e.g. Internet. One way of accessing this kind of information is to use the Wireless Application Protocol, WAP.

If the user chooses to select "Home" 71, this may lead to the next layout 75, which graphically indicates, "Connecting to Service" 80. This shows an example of how the phone is trying to establish a connection to e.g. Internet, by sending an access request, through a first gateway, to a server. If a connection is established to the first gateway, some kind of welcome text for a home page might be displayed, "Welcome to D1 Web." 90. If the user selects "Options" 90 a list of selections can be displayed as shown in the following layout 101. For example, the different options could be "Fetch content" 102, "Go to links" 103 and "End" 104. If the user chooses the option "Fetch content" 102, the browser application will generate a request to fetch a copy of a first content and a copy of the link content simultaneously. To fetch content simultaneously, the request also comprises an instruction to the server to send a copy of the first content from a given location in the server, together with a copy of the link content, simultaneously. By simultaneously means that the requested content is being sent to the terminal, as a single response to the request, wherein the response can comprise one or several data packets sent in series. Thus, upon sending this request to the server, all link content associated with the first content is downloaded to the terminal. This leads to the next layout 105, which graphically indicates, "Fetching content" 106. This shows an example of how the phone is trying to send a pull to the server, by sending a request to the server. When a connection has been established, the content is pushed to the terminal.

When the user has received the requested content successfully, the user will have the same possibilities to browse around in the content as if he/she was connected to the server. In this example, the received content is displayed with reference to Figure 6b and Fig. 6c. The numbers which refers to Figure 6b are 110-210. If the user selects "Options" 90 a list of selections can be displayed as shown in the following layout 110. For example, the different choices could be "Currency converter" 115, "White pages" 120, "Pizza" 125,

"CNN" 130, etc. In this example the user selects to use the currency converter 115, and browses further to the service in the next layout 135. In this layout 135 a browser display is shown with the selected item, which is indicated as a link to a service which provides a currency conversion. The user can select to
5 chose this item, by using the "Options" 140.

For example, the layout can be provided with different editable fields and selection list placeholders, which in this example are shown in square brackets ([]). The selection which is highlighted can indicate a default state of
10 the selection. In these fields, the user can input an amount, "Amount:[]" 165, in one currency, "From:[DKK]" 170, converted into another currency, "converted to:[DKK]" 175. When the user is going to enter an amount 185, e.g. 200, on how much he/she would like to convert, the layout may e.g. change its outlook like it does in layout 180. Thereafter, the user may press Ok 190,
15 whenever he/she is done, or clear the amount by selecting "Clear" 191.

The steps for choosing a first currency to convert from 170, and choosing a second currency to convert to 175, are repeated in the layouts 195-205. Thereafter, the user may select "Options" 210, in layout 205, which in this
20 example activates the calculation of the currency conversion and displays the result 220 in the next layout 215.

If the user wishes to continue with his/her currency conversion, and chooses another currency to convert to, the user selects the option "converted to
25 [DKK]:" 225, which becomes highlighted upon selection, and is shown in layout 230. The following reference numbers refers to Figure 6c: 215-270. In the next layout 235, a selection list of available currencies is displayed. The user selects e.g. USD 240, and selects the entry by selecting "Ok" 245. The next layout 250 highlights the selected currency USD 255 to convert to.
30 Thereafter, the user may select "Options" 260, which in this example once again activates the calculation of the currency conversion and the result

"[USD]: 36,36" 265 is displayed with the selected information in the next layout 270.

- 5 The invention is not limited to the above described and in the drawing shown an example of embodiments but can be varied within the scope of the appended claims. For example, it can be further possible to restrict the download of content, by providing an option to the user to specify which link content he/she would like to fetch a copy of.

CLAIMS

1. A cellular communication terminal (1,300) for fetching content from at least
5 one server (320-360), said terminal comprising
- a receiver and a transmitter (19) arranged to receive and transmit data packets from at least one server (320,340) through linking means (360) arranged to transmit the data packets between the terminal (1,300) and the server (320,340);
 - 10 - a first memory (16,17b) comprising an identifier and at least one item, the item is provided with an access point which indicates the location of the server (320,340) to be accessed, wherein the server (320,340) is accessed by sending the identifier to the linking means (360) to identify a first content to be accessed at the server (320,340), said first content is
15 associated with link content provided at different locations in said server or in another server;
 - a browser application, arranged to establish a session to linking means (360) by reading an item from the first memory (16,17b), and is provided with pull means to fetch a copy of the first content from the server, at the
20 location indicated by said access point, to be stored in the first or in a second memory, wherein said second memory is arranged to temporarily or permanently store said copy of the first content, and
 - a user interface (2,3,4,5,6) connected to the browser application having display means (3) for displaying the copy of the first content received from
25 the server (320,340) and user input means (2,4,5) to control the browser application,
- characterized in that the pull means is further arranged to fetch a copy of the first content and a copy of the link content simultaneously upon a request generated by the browser application, said request is arranged to be sent
30 through said transmitter as a data packet, comprising an instruction to the server to send a copy of the first content from a given location in the server, indicated by the access point, together with a copy of the link content, simultaneously.

2. A cellular communication terminal according to claim 1, characterized in that said first content and link content is provided in the same server.

3. A cellular communication terminal according to claim 1 or 2, characterized in that the pull means is provided with selecting means, in order to choose which content to be fetched.

4. A cellular communication terminal according to claim 1, 2 or 3, characterized in that said second memory (17a) is an external memory, provided with connecting means to be arranged to said terminal.

5. A cellular communication terminal according to claim 1, 2 or 3, characterized in that said second memory is arranged in said terminal.

6. A cellular communication terminal according to claim 1, 2, 3, 4 or 5, characterized in that said second memory is a cache memory.

7. A cellular communication terminal according to any of the preceding claims, characterized in that said first memory is a SIM card (16).

8. A cellular communication terminal according to any of the preceding claims, characterized in that said terminal is a cellular phone.

9. A method for fetching content from at least one server to a cellular communication terminal (1,300), said communication terminal comprising a first memory (16,17b) and a browser application, wherein the method comprises the following steps:

- reading an item (510) in said first memory (16,17b) and an identifier, by means of said browser application, said item comprising at least one access point indicating the location of a server (320,340) to be accessed;
- generating a request (520) by means of said browser application, said request comprising information of the requested access point, and the identifier identifying a first content of the requested access point, said first

content is associated with link content provided at different locations in said server or in another server;

- initiating a session to linking means (360), by transmitting the request from the communication terminal (1,300) to the linking means (360), said linking means sends data packets between the terminal (1,300) and the server (320,340),
 - identifying the request (550) at the linking means (360), and
 - establishing a session between said terminal (1,300) and said linking means (360) by sending a respond from the linking means to the terminal,
- 10 characterized in that the request, generated by means of said browser application, having an instruction to the server to send a copy of the first content from a given location in the server, indicated by the access point, together with a copy of the link content, simultaneously, and the cellular communication terminal fetches a copy of the first content and a copy of the link content simultaneously.

10. A method according to claim 9, characterized in that the copy of the first content and the link content is stored in a second memory (17a).

- 20 11. A method according to claim 9 or 10, characterized in fetching the copy of first content and the link content from the same server.

12. A method according to claim 11, characterized in fetching a copy of the link content from a further server(s).

25

13. A system (301) for fetching content from at least one server (320-340), said system (301) comprising

- a cellular communication terminal (1,300) having:
 - a receiver and a transmitter (19) arranged to receive and transmit data packets from at least one server (320,340) through linking means (360) arranged to transmit the data packets between the terminal (1,300) and the server (320,340);
 - a first memory (16,17b) comprising an identifier and at least one item, the item is provided with an access point which indicates the location of
- 30

- the server (320,340) to be accessed, wherein the server (320,340) is accessed by sending the access point and the identifier to the linking means (360) to identify a first content to be accessed, said first content is associated with link content provided at different locations in said server or in another server;
- 5
- a browser application, arranged to establish a session to linking means (360) by reading an item from the first memory (16,17b), and is provided with pull means to fetch a copy of the first content from the server, at the location indicated by said access point, to be stored in
 - 10 the first or in a second memory, wherein said second memory is arranged to temporarily or permanently store said copy of the first content, and
 - a user interface (2,3,4,5,6) connected to the browser application, having display means (3) for displaying the first content and user input means (2,4,6) to control the browser application,
 - 15
 - a cellular communication network (310), arranged to establish a connection (305) between the cellular communication terminal (1,300) and linking means (360),
 - linking means (360), arranged to enable a session for said cellular
 - 20 communication terminal (1,300) and to transmit data packets between the terminal and a server (320,340), and
 - at least one server (320,340), arranged to receive and/or transmit data packets from/to the terminal (1,300),
- characterized in that the pull means is further arranged to fetch a copy of the first content and a copy of the link content simultaneously upon a request
- 25 generated by the browser application, said request is arranged to be sent through said transmitter as a data packet, comprising an instruction to the server to send a copy of the first content from a given location in the server, indicated by the access point, together with a copy of the link content,
- 30 simultaneously.

14. A system according to claim 13, characterized in that said first content and link content is provided in the same server.

15. A system according to claim 13 or 14, characterized in that said second memory (17a) is an external memory, provided with connecting means to be inputted to said terminal.

5 16. A system according to claim 13 or 14, characterized in that said second memory is arranged in said terminal.

17. A system according to claim 13, 14, 15 or 16, characterized in that said second memory (17a) is a cache memory.

10

18. A system according to claim 13, 14, 15, 16 or 17, characterized in that said first memory is a SIM card (16).

15 19. A system according to any one of the claims 13-18, characterized in that communication between the server and the terminal is in accordance with the Wireless Application Protocol.

20 20. A communications device for accessing a server accessible via a proxy, the device comprising a transceiver and a browser, the transceiver being operable to establish a session with a proxy, the proxy providing access to a server wherein the browser is operable to retrieve first content from the server together with further content linked to the first content.

25 21. A device as claimed in Claim 20, further including a memory in which the retrieved content is stored.

22. A device as claimed in Claim 20 or 21, wherein the browser is operable to retrieve the further content from a further server.

30 23. A device as claimed in Claim 20, 21, or 22, wherein the browser is selectively operable to retrieve the further content.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
21 December 2000 (21.12.2000)


PCT

(10) International Publication Number
WO 00/78010 A1

- (51) International Patent Classification⁷: H04L 29/06 (74) Agents: HAWS, Helen et al.; Nokia IPR Dept., Nokia House, Summit Avenue, Southwood, Farnborough, Hampshire GU14 0NG (GB).
- (21) International Application Number: PCT/IB00/00834
- (22) International Filing Date: 9 June 2000 (09.06.2000) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 9913678.0 11 June 1999 (11.06.1999) GB (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): NOKIA MOBILE PHONES LIMITED [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): PEDERSEN, Claus [DK/DK]; Kronens kvt. 16A, DK-2620 Albertslund (DK). Published: — With international search report.

[Continued on next page]

(54) Title: METHOD AND SYSTEM FOR FETCHING CONTENT FROM A SERVER IN A CELLULAR COMMUNICATION SYSTEM

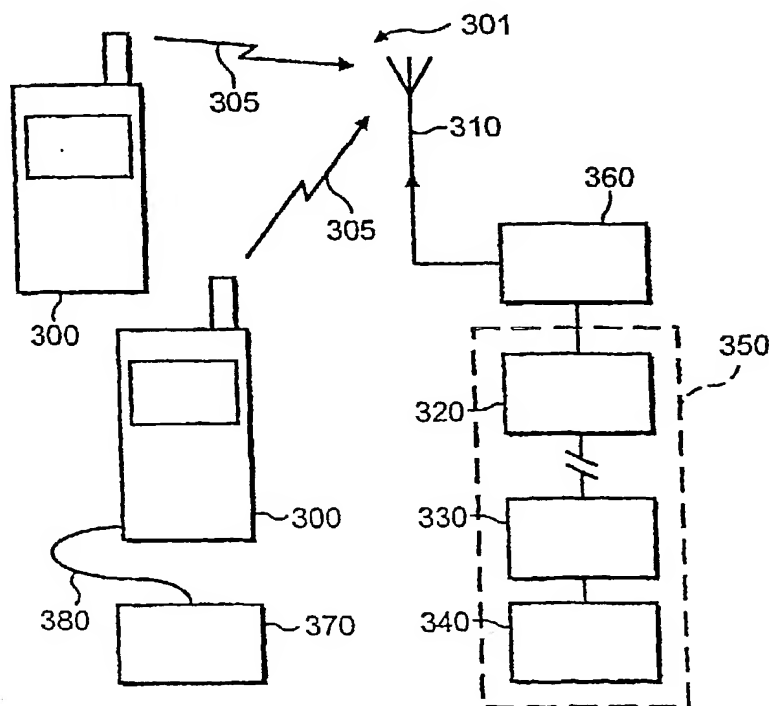

(57) Abstract: A system (301), a method, and a cellular communication terminal (1, 300) for fetching content from at least one server (320-360). The cellular communication terminal (1, 300) is arranged with a receiver and a transmitter (19), to receive and transmit data packets from at least one server (320, 340) through linking means (360). The linking means is arranged to transmit the data packets between the terminal (1, 300) and the server (320, 340). The terminal is further arranged with a first memory (16, 17b) comprising an identifier and at least one item. The item is provided with an access point, which indicates the location of the server (320, 340) to be accessed. The server (320, 340) is accessed by sending the access point and the identifier to the linking means (360) to identify a first content to be accessed. The first content is associated with link content, which is provided at different locations in the server or on other servers. A browser application is arranged in the terminal, to establish a session to linking means (360), by reading an item from the first memory (16, 17b).

WO 00/78010 A1

WO 00/78010 A1



— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

1 / 6

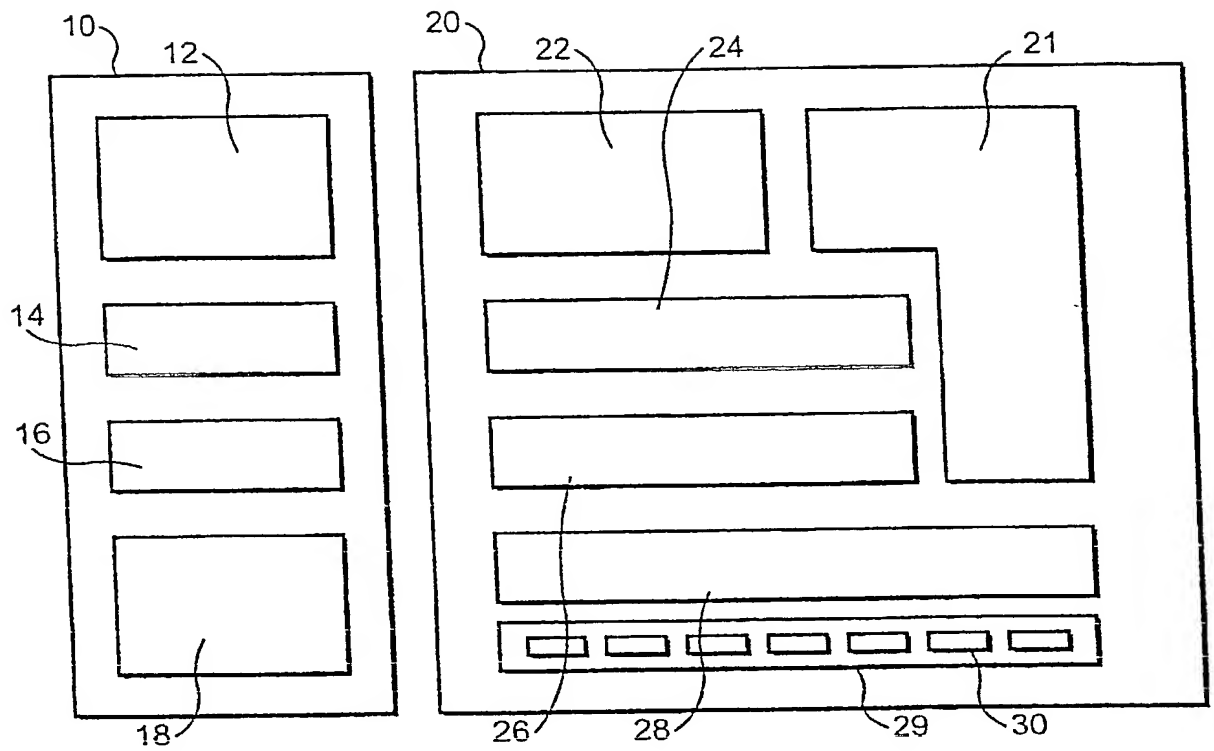


FIG. 1

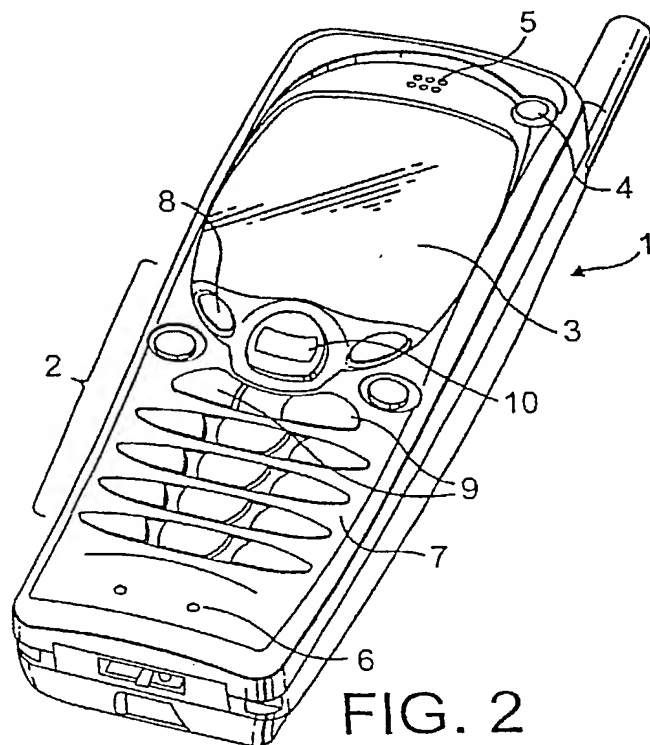


FIG. 2

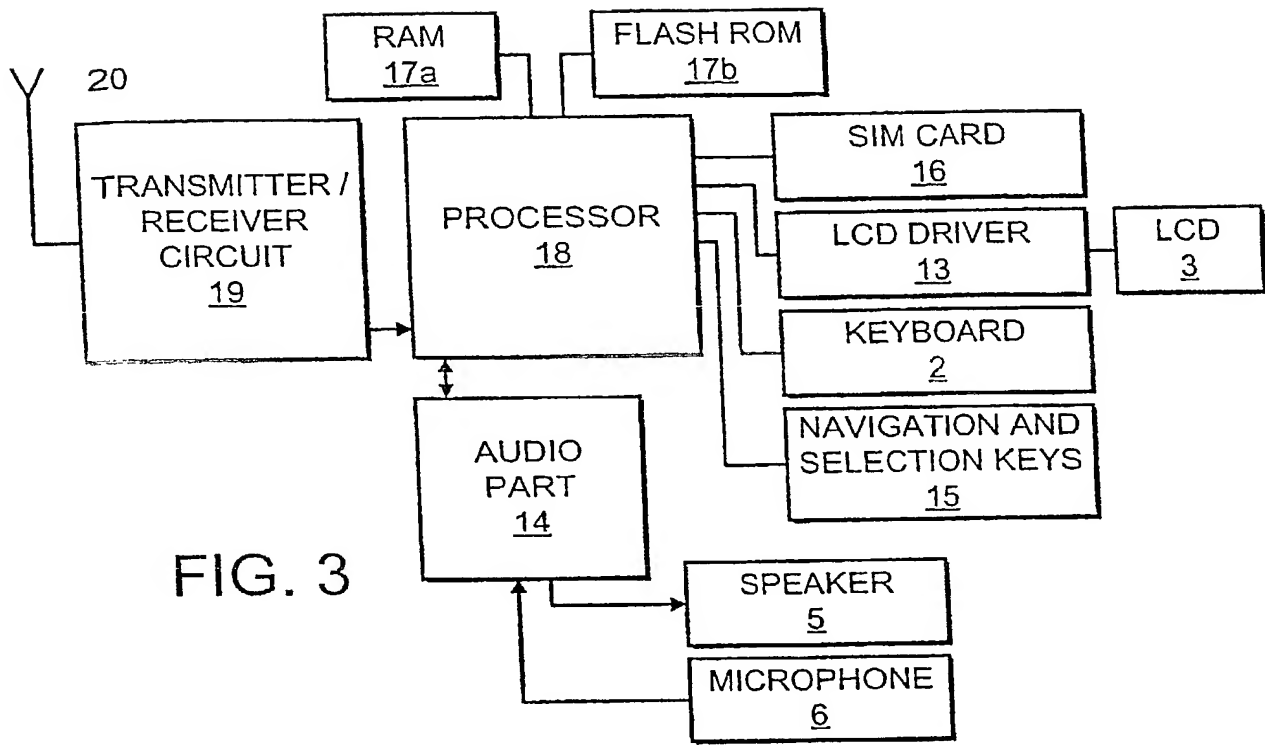


FIG. 3

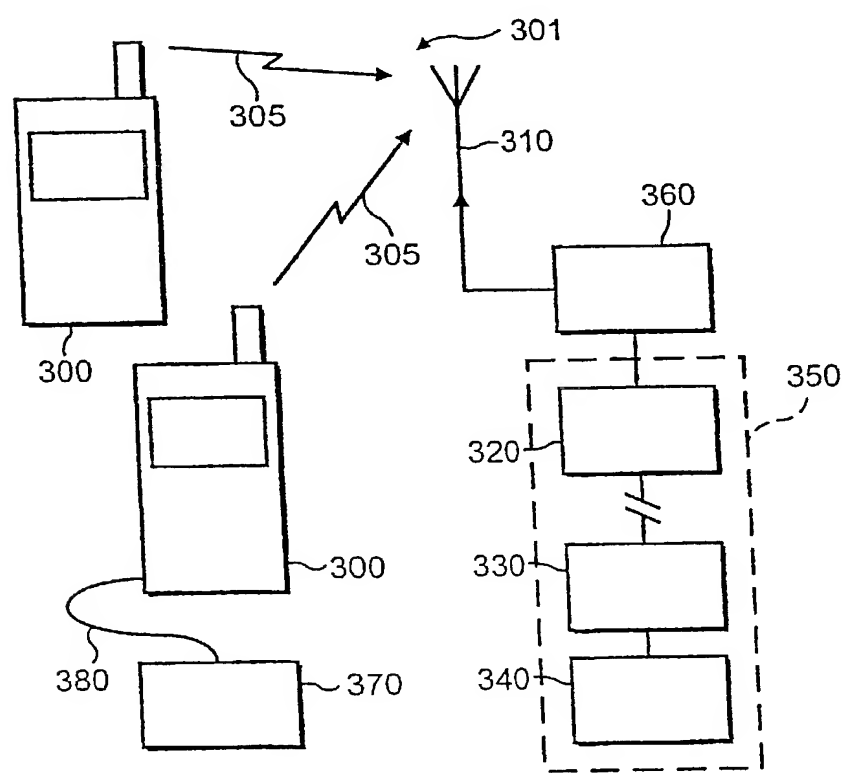


FIG. 4

3 / 6

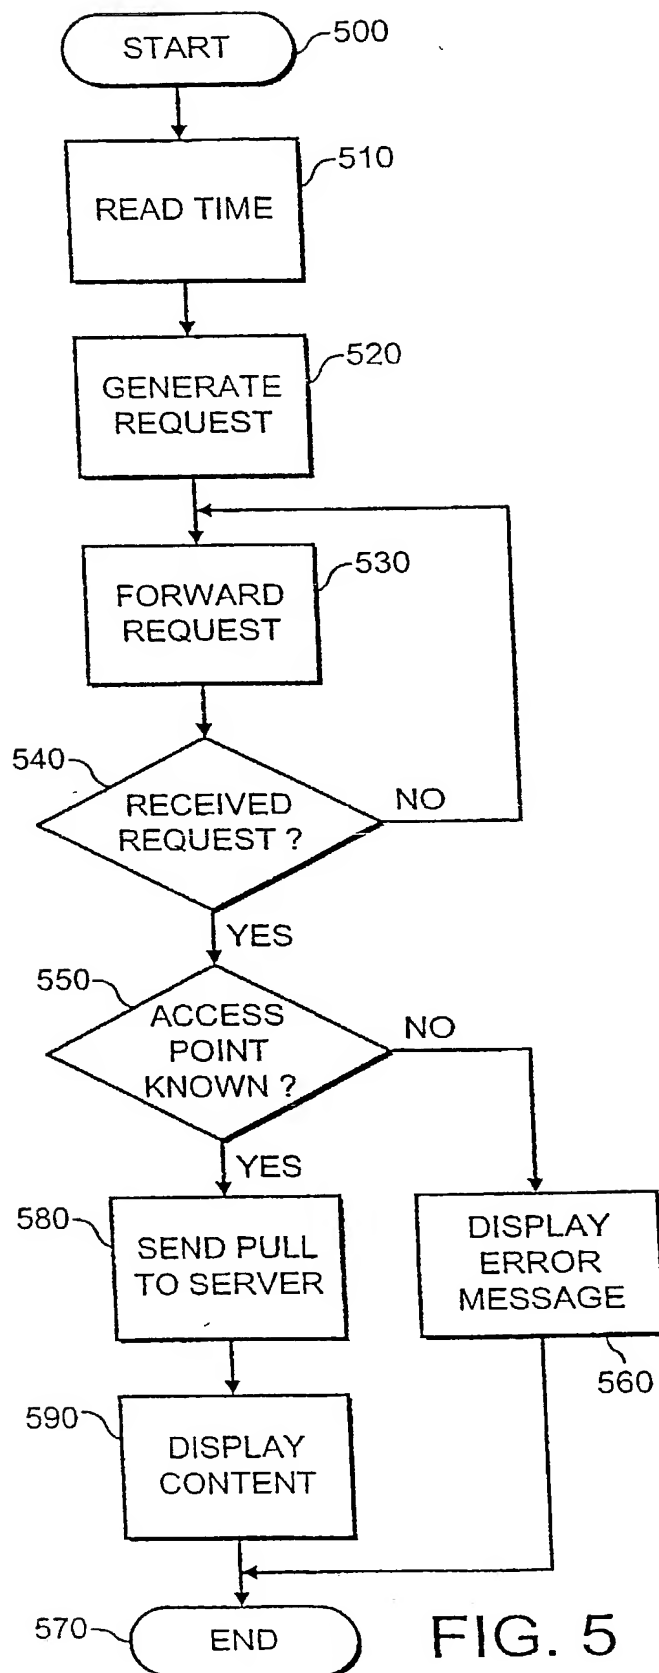


FIG. 5

4 / 6

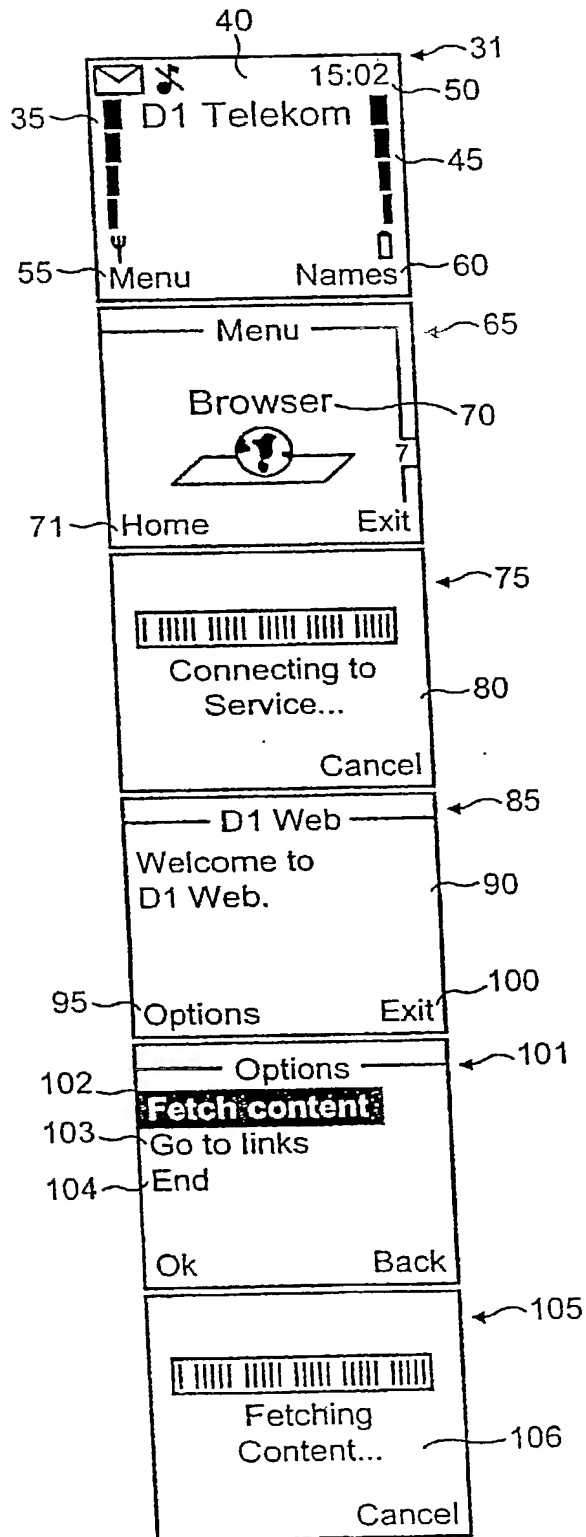


FIG. 6a


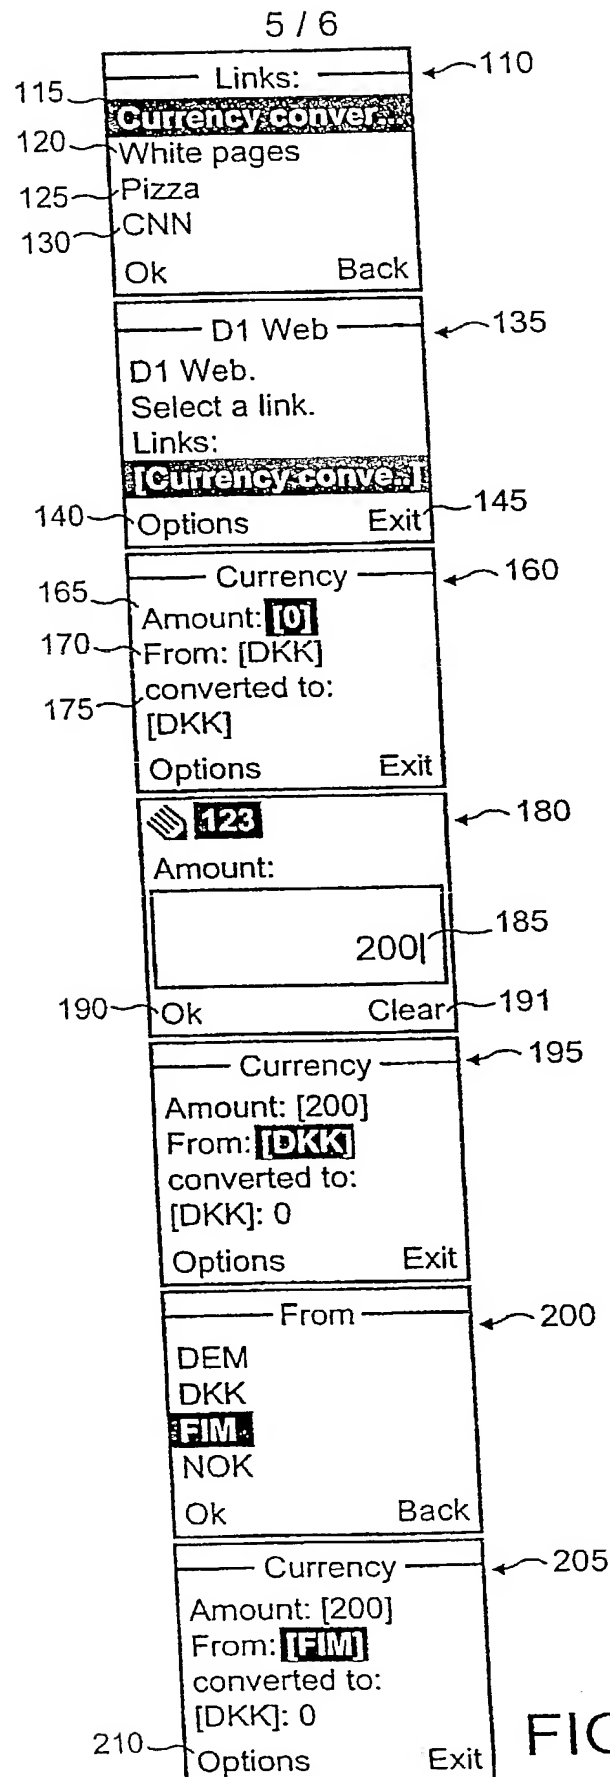


FIG. 6b

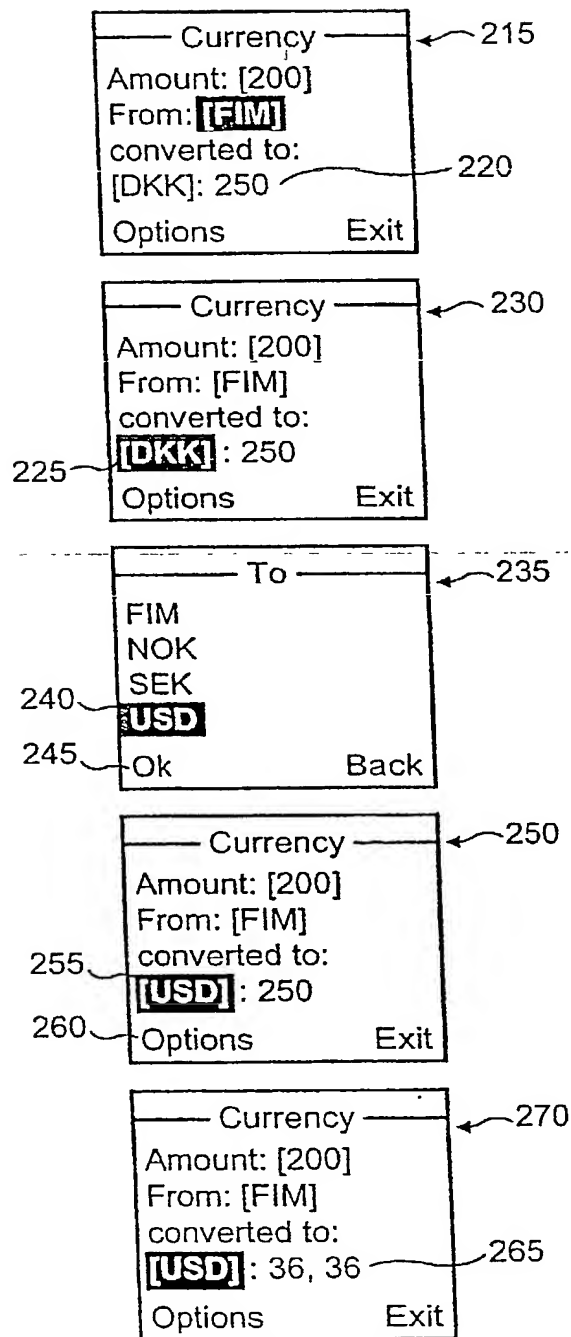

*** THE END ***

FIG. 6c

30 JUN 2001

Attorney's Docket No.: 367,40891X00

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that: my residence, post office address and country of citizenship are as stated below, next to my name; I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **METHOD AND SYSTEM FOR FETCHING CONTENT FROM A SERVER IN A CELLULAR COMMUNICATION SYSTEM**

the specification of which

is attached hereto.

X

was filed on December 11, 2001 as

United States Application Number 10/009,499

or PCT International Application Number _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits, under 35 U.S.C. 119(a)-(d) or 365(b), of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority
Claimed?

9913678.0

GB

June 11, 1999

(Number)

(Country)

(Foreign Filing Date)

Yes

No

(Number)

(Country)

(Foreign Filing Date)

Yes

No

I hereby claim the benefit, under 35 U.S.C. 119(e), of any United States provisional application(s) listed below:
NONE

(Application Number)

Filing Date

(Application Number)

Filing Date

I hereby claim the benefit, under 35 U.S.C. 120, of any United States application(s) listed below:

(Application Number)

Filing Date

(Status -- patented, pending, abandoned)

(Application Number)

Filing Date

(Status -- patented, pending, abandoned)

I hereby appoint: Donald R. Antonelli, Reg. No. 20,296; Melvin Krans, Reg. No. 22,466; William I. Solomon, Reg. No. 28,565; Gregory E. Montone, Reg. No. 28,141; Ronald J. Shore, Reg. No. 28,577; Donald E. Stout, Reg. No. 26,422; Alan E. Schiavelli, Reg. No. 32,087; James N. Dresser, Reg. No. 22,973; Carl I. Brundidge, Reg. No. 29,621; Paul J. Skwierawski, Reg. No. 32,173; and Robert M. Bauer, Reg. No. 34,487; of ANTONELLI, TERRY, STOUT & KRAUS, LLP with offices located at 1300 North Seventeenth Street, Suite 1800, Arlington, Virginia 22209, my attorneys, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send all correspondence to:

Customer Number 020457
ANTONELLI, TERRY, STOUT & KRAUS, LLP
1300 North Seventeenth Street
Suite 1800
Arlington, VA. 22209

Direct all telephone calls and faxes to:

TEL: (703) 312-6600
 FAX: (703) 312-6666

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor Claus PEDERSEN

Inventor's Signature 

Date 29/5-2002

Residence Same as Mailing Address

Citizenship Danish

(City, State)

(Country of Citizenship)

Mailing Address NORDMARKSVAENGET 44 DK-2625 VALLENSBAEK, DENMARK

Full Name of Second/Joint Inventor _____

Inventor's Signature _____

Date _____

Residence Same as Mailing Address

Citizenship _____

(City, State)

(Country of Citizenship)

Mailing Address _____

Full Name of Third/Joint Inventor _____

Inventor's Signature _____

Date _____

Residence _____

Citizenship _____

(City, State)

(Country of Citizenship)

Mailing Address _____

Full Name of Fourth/Joint Inventor _____

Inventor's Signature _____ Date _____

Residence _____ Citizenship _____
 (City, State) (Country of Citizenship)

Mailing Address _____

Full Name of Fifth/Joint Inventor _____

Inventor's Signature _____ Date _____

Residence _____ Citizenship _____
 (City, State) (Country of Citizenship)

Mailing Address _____

Full Name of Sixth/Joint Inventor _____

Inventor's Signature _____ Date _____

Residence _____ Citizenship _____
 (City, State) (Country of Citizenship)

Mailing Address _____

Full Name of Seventh/Joint Inventor _____

Inventor's Signature _____ Date _____

Residence _____ Citizenship _____
 (City, State) (Country of Citizenship)

Mailing Address _____

11/10/94 9:50 AM

Title 37, Code of Federal Regulations, Section 1.56
Duty to Disclose Information Material to Patentability

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is cancelled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is cancelled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

(1) Prior art cited in search reports of a foreign patent office in a counterpart application, and

(2) The closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

(1) It establishes, by itself or in combination with other information, a *prima facie* case of unpatentability of a claim; or

(2) It refutes, or is inconsistent with, a position the applicant takes in:

(i) Opposing an argument of unpatentability relied on by the Office, or

(ii) Asserting an argument of patentability.

A *prima facie* case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

(1) Each inventor named in the application;

(2) Each attorney or agent who prepares or prosecutes the application; and

(3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.

(e) In any continuation-in-part application, the duty under this section includes the duty to disclose to the Office all information known to the person to be material to patentability, as defined in paragraph (b) of this section, which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.